




## PORTABLE PNEUMATIC TUBE CLEANERS

1/4" & UP  
I.D.

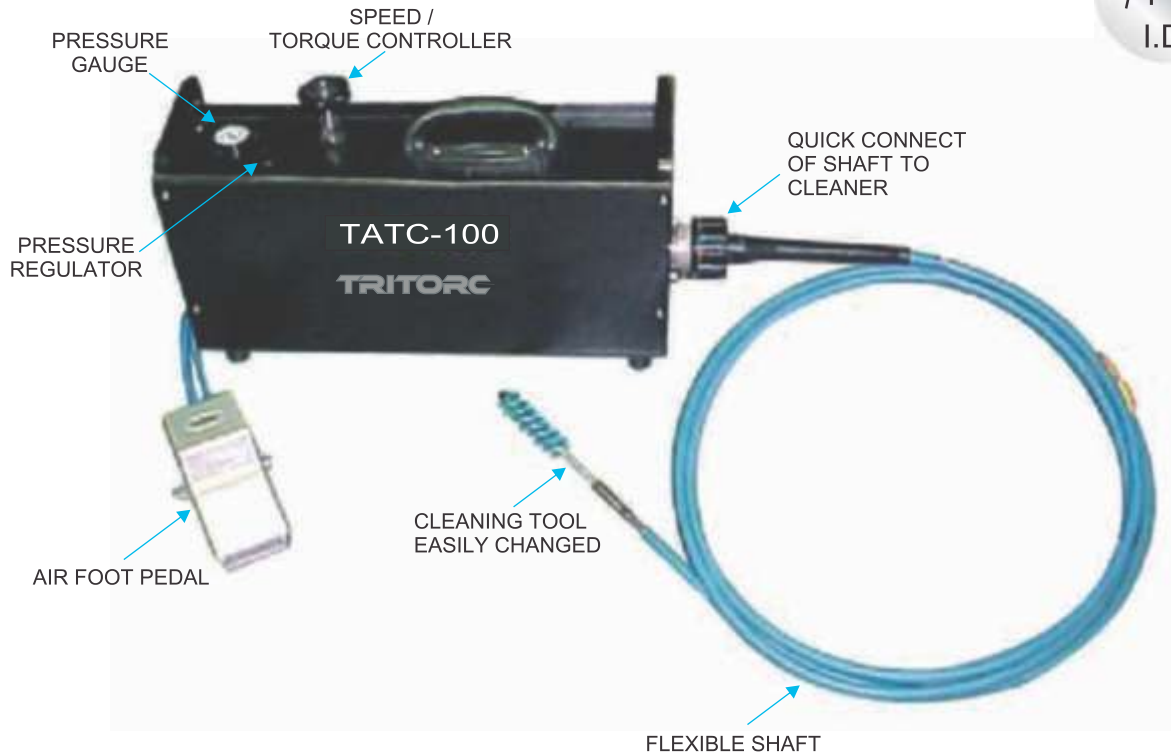

### Features :

- Shock Resistant - Excellent for applications where use of electric equipment is hazardous.
- Versatile - Interchangeability of different size flexible shafts and cleaning tools.
- Speed/Torque control - Shaft rotation speed can be set at optimum for each application.
- No Tooling - Quick disconnection of flexible shaft.
- Time Saving - Simultaneous water flush to remove deposits from tubes.
- Cleanliness - Foot switch for operator's convenience to activate both shaft rotation and water flow to reduce water consumption and making working area clean.
- Compact - Light weight easy to operate inside drum.

Model-TATC-100 Portable Pneumatic Tube Cleaning Machine includes FRL unit, adjustable speed/torque control, and air foot pedal. The TATC-100 uses a cleaning tool mounted on the tip of a flexible shaft, which is available in different lengths and diameters to fit the size of the tube to be cleaned. For wet applications, as the shaft rotates inside its watertight nylon casing, the unit feeds water through the casing to the cleaning tool.

A foot switch controls shaft rotation and water flow. While the operator feeds the rotating shaft assembly through the tube, the water flow softens the deposits before cleaning and flushes them out during cleaning.

| Tube I.D. |          | Tube Cleaner<br>Model No. | Motor Power |     | Motor<br>Speed<br>RPM | Air Supply   |                | Weight |     | Dimension      |           |            |
|-----------|----------|---------------------------|-------------|-----|-----------------------|--------------|----------------|--------|-----|----------------|-----------|------------|
| mm        | inch     |                           | HP          | KW  |                       | Min          | Max            | lbs.   | Kg. | High           | Wide      | Deep       |
| 6.4 & UP  | 1/4 & UP | TATC-100                  | 1.7         | 1.1 | 300-3000              | 60psi@ 15cfm | 100psi @ 70cfm | 26     | 12  | 10.3/8"(655mm) | 6"(152mm) | 19"(483mm) |