


## **TUBE CLEANER ACCESSORIES - FLEXIBLE SHAFTS**

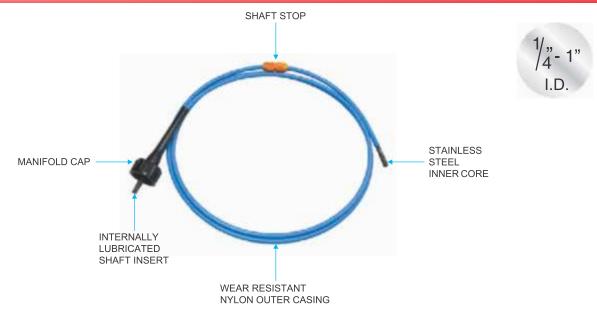

## For TTC-40, TTC-60

## FLEXIBLE SHAFTS WITH STAINLESS STEEL INNER CORE

When ordering flexible shafts and accessories, each item should be ordered for specific tube/pipe size or size range. Shafts have color coded shaft stops for easy identification. Stainless Steel inner cores ensure our shafts have longest life, flexibility and resistance to corrosion. Since the inner core of the shafts are the heart of the system and take most of the strain, stainless steel inner cores cause our shafts to last longer than the competition.

To order Flexible Shaft(s), determine tube I.D.(s) and length of the longest tube(s). Order Flexible Shaft(s) to correspond with tube I.D.(s) and lengths. Please ask us for special or longer lengths.

Tube I.D. Range mm inch		Flexible Shaft Model No.	Flexible Shaft Length feet mtrs		Shaft Core O.D. mm inch		Shaft Casing O.D.		Tool End Thread
6.4-9.5	1/4-3/8	TFS-250-40	13	4.0	3.2	1/8	6.4	1/4	8 - 32 F
		TFS-250-79	26	7.9					
11.1-12.7	7/16-1/2	TFS-375-40	13	4.0	6.4	1/4	9.5	3/4	1/4 - 28 F
		TFS-375-55	18	5.5					
		TFS-375-79	26	7.9					
		TFS-375-110	36	11.0					
		TFS-375-140	46	14.0					
14.3-25.4	9/16-1	TFS-500-40	13	4.0	7.9	5/16	12.7	1/2	1/4 - 28 F
		TFS-500-55	18	5.5					
		TFS-500-79	26	7.9					
		TFS-500-110	36	11.0					
		TFS-500-140	46	14.0					
		TFS-500-184	61	18.4					
		TFS-500-232	76	23.2					

## FLEXIBLE SHAFTS FOR INTERNALLY GROOVED TUBES

Tube I.D. Range mm inch		Flexible Shaft Model No.	Flexible Shaft Length feet mtrs		Shaft Core O.D. mm inch		Shaft Casing O.D.		Tool End Thread
17.5-25.4	11/16-1	TFS-560-40	13	4.0	9.5	3/8	14.3	9/16	1/4 - 28
		TFS-560-55	18	5.5					
		TFS-560-79	26	7.9					
		TFS-560-110	36	11.0					
		TFS-560-140	46	14.0					
		TFS-560-186	61	18.6					
		TFS-560-232	75	23.2					

Note: TFS - 560 shafts can be supplied with Teflon® casing for when using dry. To order add suffix "T" to shaft number. Teflon is a trademark of Du Pont Company.

Note: See page 102 for shaft repair equipment.